


NEO-F10N module



u-blox F10 standard precision GNSS module

L1/L5 dual-band GNSS receiver for meter-level accuracy in urban environments

- Effective multipath mitigation to boost urban accuracy
- Exceptional RF interference immunity with co-located cellular modems
- Proven excellent performance, even with small antennas
- Upgradeable firmware for future-proof designs
- Pin-compatible with previous NEO products for easy migration

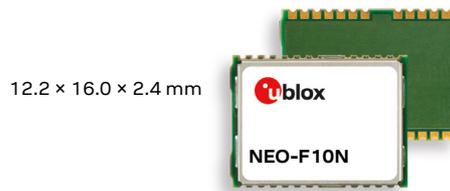

Product description

The NEO-F10N is built on the u-blox F10 dual-band GNSS technology using L1/L5 GNSS bands, which provides solid meter-level position accuracy in urban areas.

With its proprietary dual-band multipath mitigation technology, u-blox F10 uses the best signals from the L1/L5 bands to achieve a significantly better position accuracy in urban environments than with the L1 band only. Applications like vehicle tracking and micromobility benefit significantly.

NEO-F10N offers a single antenna input. Two SAW filters in series with an LNA between them provide high robustness against RF interference from co-located cellular modems. The firmware is upgradeable and is highly configurable to support many different use cases.

NEO-F10N is pin-to-pin compatible with previous u-blox generations, which saves designers time and cost when upgrading their designs.

u-blox modules are manufactured in IATF 16949 certified sites and are fully tested on a system level. Qualification tests are performed as stipulated in the ISO16750 standard: “Road vehicles – Environmental conditions and testing for electrical and electronic equipment”.

NEO-F10N

	NEO-F10N
Grade	
Automotive	
Professional	•
Standard	
GNSS	
GPS / QZSS	•
Galileo	•
BeiDou	•
NavIC	•
Multi-band	L1/L5/E5a/B2a
Interfaces	
UART	1
Features	
Programmable (Flash)	•
Additional SAW	•
Additional LNA	•
RTC crystal	•
Oscillator	T
Time pulse output	1
Power supply	
2.7 V – 3.6 V	•

T = TCXO



Features

Receiver type	u-blox F10 engine GPS L1C/A, L5 GAL E1B/C, E5a BDS B1C, B2a QZSS L1C/A, L5 NavIC L5 SBAS L1C/A: WAAS, EGNOS, L1Sb, GAGAN	
Nav. update rate ¹	up to 10 Hz	
Horizontal position accuracy ²	1.0 m CEP (with SBAS) 1.5 m CEP (without SBAS)	
Acquisition	Cold starts	28 s
	Aided starts	2 s
	Reacquisition	1 s
Sensitivity	Tracking and nav.	-167 dBm
	Reacquisition	-160 dBm
	Cold start	-148 dBm
	Hot start	-159 dBm
Oscillator	TCXO	
RTC crystal	Built-in	

Tracking features

Odometer	Measure traveled distance with support for different user profiles
Protection level	Real-time position accuracy estimate with 95% confidence

Security features

Signal integrity	RF interference & jamming detection and reporting Spoofing detection and reporting
Device integrity	Secure boot of firmware downloaded from host or flash Receiver configuration lock by command
Secure interface	Signed UBX messages (SHA-256) JTAG debug interface disabled by default

Compatible u-blox location services

AssistNow	Real-time online A-GNSS service with assured global availability
-----------	--

1 = The highest navigation rate can limit the number of supported constellations

2 = Depends on atmospheric conditions, GNSS antenna, multipath conditions, satellite visibility, and geometry

Package

24-pin LCC (Leadless Chip Carrier) 12.2 x 16.0 x 2.4 mm, 1.6 g

Environmental data, quality, and reliability

Operating temp.	-40 °C to +85 °C
Storage temp.	-40 °C to +85 °C
Environmental grade	2015/863/EU RoHS-3
EMC (electromagnetic compatibility)	2014/53/EU RED
Environmental testing	ISO 16750
Quality management	Manufactured and fully tested in IATF 16949 certified production sites

Electrical data

Supply voltage	2.7 V to 3.6 V
Power consumption	63 mW (3 GNSS)
Backup supply	1.65 V to 3.6 V

Interfaces

Serial interfaces	1 UART
Digital I/O	Configurable timepulse 1 EXTINT input for Wakeup
Time pulse output	Configurable: 0.25 Hz to 10 MHz
Raw data output	Code phase data
Supported antennas	Active and passive
Protocols	NMEA, UBX binary

Support products

u-blox support products provide reference design, and allow efficient integration and evaluation of u-blox positioning technology.

ANN-MB5	L1/L5 multi-band active GNSS antenna
EVK-F10N	u-blox F10 GNSS evaluation kit for NEO-F10N
u-center 2	Highly intuitive software for GNSS performance evaluation

Product variants

NEO-F10N-00B	u-blox F10 GNSS LCC module, upgradeable firmware in flash memory, SAW filter, LNA
--------------	---

Further information

For contact information, see www.u-blox.com/contact-u-blox.
For more product details and ordering information, see the product data sheet.

Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose, or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.